


DrainHog-S

FOOD INTERCEPTOR



SUBMITTAL DATA SHEET

	in	mm		in	mm
A	11 ¼"	286	G	8"	203
B	8"	203	H	9 ¾"	248
C	11 ¼"	286	I	3 ⅜"	86
D	1 ½" FNPT	38	J	17 ⅝"	448
E	1 ¼"	32	K	11 ¼"	286
F	2" MNPT	51			

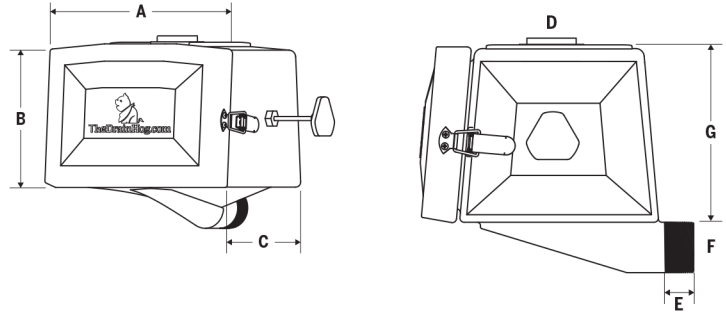


HOGGEEZ FILTERS

Available in master packs of 3 x 24 units with breakable ring.

Refer to TheDrainHog.com to choose your filters in regards with the desired application.

- Nylon (DHN)
- Biodegradable Cotton (DHC)
- Nylon 40 deniers (DHN40)

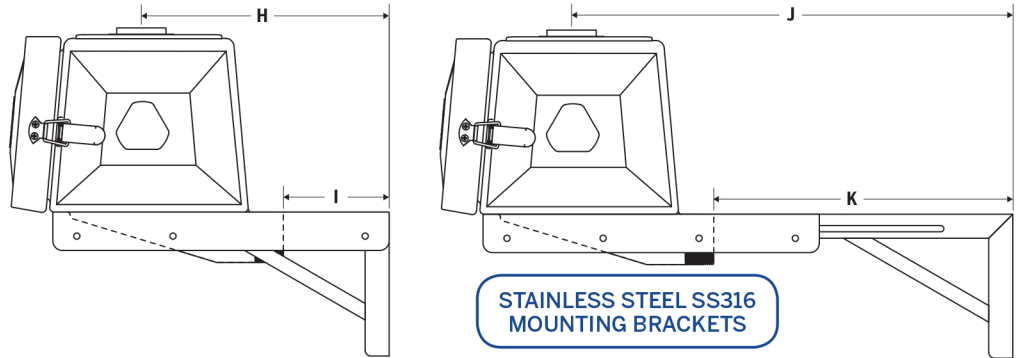

Provided with stainless steel installation screws, stainless steel wall mounting brackets (2) and short inlet spout.

SUBMITTAL DATA

Furnish and install, as shown on plans a suspended DrainHog food interceptor. The unit must be delivered with a minimal amount of _____ Hoggeez (Filters) model _____. The unit must be equipped with a 1 ½" FNPT PVC short inlet spout. The design of the unit must facilitate a natural flow through the 2" MNPT outlet of the unit for disposal in order to avoid any stagnant residual water. The unit must have a 3 mm plastic (polyethylene) wall thickness. Access to the Hoggeez-type filter must be made via a front opening of at least 50 in², sealed by a gasket and two handles. Each DrainHog unit must have a unique serial number and must be DrainHog-S model number, or approved equal.

Notes: _____

Project: _____ Representative: _____

Location: _____ Date submitted: _____

Engineer: _____ Approved by: _____

Contractor: _____ Date of approval: _____